BASAK

www.basaktraktor.com.tr

/basaktraktorglobal /basaktraktortr /basaktractor /başak traktör

SZEGÁNA Kft.
6791 Szeged
Dorozsmai út 143.
Tel/Fax: 62/554-640
www.szegana.hu

Başak Traktör A.Ş. reserves the right to change the specifications given

PRODUCT RANGE

https://tractormanualz.com/

2047 ECO ORCHARD

- 48 HP, 3 CYLINDER STAGE III A ENGINE
- 8 FORWARD 2 REVERSE GEARS
- ROPS

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2047 ECO ORCHARD	TECHNICAL SPECIFICATIONS
ENGINE	2 WD
Engine Type	3100L
Emission Type	Stage 3A
Aspiration	Natural Aspiration
Cubic Capacity/Number of Cylinders (cm³/ Number)	2803 / 3
Max. Engine Power (ISO 14396) (kw/hp/rpm)	35 / 48 / 2100
Max Torque (Nm / rpm)	168,5 / 1358
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	40
TRANSMISSION	
Gearbox Type	Mechanical
Number of Speeds	8 + 2
4WD Actuation	-
Front Differential Lock System	-
Rear Differential Lock System	Mechanically Controlled
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	2
Lifting Capacity (kg)	1300
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Single Speed
Pto (rpm)	540 (1838)
Pto (rpm)	-
BRAKES	
Type	Dry Type
Foot Brake	Mechanically Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	6,00 - 16
1. Option (Rear)	13,6 - 24
2. Option (Front)	6,00 - 16
2. Option (Rear)	13,6 - 28
DIMENSIONS (mm)	
Length	3755
Height	2230
Wheelbase	1995
Track Width (Front) (mm)	1325 - 1525
Track Width (Rear) (mm)	1370 - 1570
Ground Clearence	365
WEIGHTS (kg)	
Front Weights	2x30 + 50 / 4x24**
Rear Weights	2x(35 + 50) / 2x35**
Total Weight (Without Ballasts)	1900

https://tractormanualz.com/

2060 BB ORCHARD

- 58 HP, 3 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2060 BB ORCHARD TECHNICAL SPECIFICATIONS

ENGINE	2WD	4WD
Engine Type	ITL 3100 FLT	
Emission Type	Stage 3A	
Aspiration	Turbo / Intercooler	
Cubic Capacity/Number of Cylinders (cm³/ Number)	2780 / 3	
Max. Engine Power (ISO 14396) (kw/hp/rpm)	43 / 58 / 2100	
Max Torque (Nm / rpm)	230 / 1300	
Engine Cooling System	Water Cooled	
Fuel Capacity (lt)	87,5	
TRANSMISSION		
Gearbox Type	Mechanical Synchromesh	
Number of Speeds	16 + 8	
4WD Actuation	-	Mechanical
Front Differential Lock System	-	Limited Slip
Rear Differential Lock System	Mechanically Controlled	
Clutch	Double Plate Dry Type (with independent control for PTO)	
HYRAULIC SYSTEM		
Functions	Position - Power - Mixed	
Hydraulic Power Output Valves	4	
Lifting Capacity (kg)	2600	
Three Point Hitch System	Category II	
POWER TAKE OFF		
Type	Independent Double Speed	
Pto (rpm)	540 (1958)	
Pto (rpm)	540E (1508)	
BRAKES		
Type	Oil Bath Disc Brake	
Foot Brake	Mechanically Controlled	
Hand Brake	Mechanically Controlled	
TYRES		
1. Option (Front)	8,50 - 16	280/70R18
1. Option (Rear)	380/70R24	380/70R24
2. Option (Front)	8,50 - 16	280/70R18
2. Option (Rear)	380/70R28	380/70R28
DIMENSIONS (mm)		
Length	3870	3880
Height	2370	2377
Wheelbase	2075	2034
Track Width (Front) (mm)	1320 / 1420	1340
Track Width (Rear) (mm)	1285	
Ground Clearance	338	338
WEIGHTS (kg)		
Front Weights	2x30 + 50	6x30 + 50
Rear Weights	2x50	
Total Weight (Without Ballasts)	2460	2880

https://tractormanualz.com/

2080 BB ORCHARD

- 79 HP, 3 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2080 BB ORCHARD	TECHNICAL SPECIFICATIONS
ENGINE	4WD
Engine Type	1103D - 33TA
Emission Type	Stage 3A
Aspiration	Turbo / Intercooler
Cubic Capacity/Number of Cylinders (cm³/Number)	3300 / 3
Max. Engine Power (ISO 14396) (kw/hp/rpm)	58 / 79 / 2200
Max Torque (Nm / rpm)	310 / 1400
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	67,5
TRANSMISSION	
Gearbox Type	Mechanical Synchromesh
Number of Speeds	16 + 8
4WD Actuation	Mechanically Controlled
Front Differential Lock System	Limited Slip
Rear Differential Lock System	Mechanically Controlled
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	4
Lifting Capacity (kg)	3000
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Double Speed
Pto (rpm)	540 (1056)
Pto (rpm)	540E (1506)
BRAKES	
Type	Oil Bath Disc Brake
Foot Brake	Mechanically Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	260/70R16
1. Option (Rear)	360/70R24
2. Option (Front)	280/70R18
2. Option (Rear)	380/70R28
DIMENSIONS (mm)	
Length	3870
Height	2000
Wheelbase	2047
Track Width (Front) (mm)	1340
Track Width (Rear) (mm)	1285
Ground Clearence	290/338***
WEIGHTS (kg)	
Front Weights	8x30 + 50
Rear Weights	2 x 47 + 54) / 2 x 50
Total Weight (Without Ballasts)	2800

https://tractormanualz.com/

2080 BB CABIN ORCHARD

- 79 HP, 3 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2080 BB CABIN ORCHARD	TECHNICAL SPECIFICATIONS
ENGINE	4WD
Engine Type	1103D - 33TA
Emission Type	Stage 3A
Aspiration	Turbo / Intercooler
Cubic Capacity/Number of Cylinders (cm³)/Number)	3300 / 3
Max. Engine Power (ISO 14396) (kw/hp/rpm)	58 / 79 / 2200
Max Torque (Nm / rpm)	310 / 1400
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	67,5
TRANSMISSION	
Gearbox Type	Mechanical Synchromesh
Number of Speeds	16 + 8
4WD Actuation	Mechanically Controlled
Front Differential Lock System	Limited Slip
Rear Differential Lock System	Mechanically Controlled
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	4
Lifting Capacity (kg)	3000
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Double Speed
Pto (rpm)	540 (1958)
Pto (rpm)	540E (1506)
BRAKES	
Type	Oil Bath Disc Brake
Foot Brake	Mechanically Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	260/70R16
1. Option (Rear)	380/70R24
2. Option (Front)	280/70R18
2. Option (Rear)	380/70R28
DIMENSIONS (mm)	
Length	3870
Height (380/70R24)	1880
Wheelbase	2047
Track Width (Front) (mm)	1340
Track Width (Rear) (mm)	1285
Ground Clearence	290/338**
WEIGHTS (kg)	
Front Weights	8x30 + 50
Rear Weighss	2 x 47 + 54 / 2 x 50
Total Weight (Without Ballasts)	2950

https://tractormanualz.com/

2047
ECO COMPACT

- 48 HP, 3 CYLINDER STAGE III A ENGINE
- 8 FORWARD 2 REVERSE GEARS
- ROPS

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2047 ECO COMPACT	TECHNICAL SPECIFICATIONS
ENGINE	2WD
Engine Type	3100L
Emission Type	Stage 3A
Aspiration	Natural Aspiration
Cubic Capacity/Number of Cylinders (cm^3/ Number)	2893 / 3
Max. Engine Power (ISO 14396) (kw/hp/rpm)	35 / 48 / 2100
Max Torque (Nm / rpm)	168,5 / 1258
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	40
TRANSMISSION	
Gearbox Type	Mekanik
Shuttle Arm	-
Number of Speeds	8 + 2
4WD Actuation	-
Front Differential Lock System	-
Rear Differential Lock System	Mechanically Controlled
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	2
Lifting Capacity (kg)	1300
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Single Speed
Pto (rpm)	540 (1939)
BRAKES	
Type	Dry Type
Foot Brake	Mechanically Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	6,50 - 16
1. Option (Rear)	13,6 - 28
2. Option (Front)	6,50 - 16
2. Option (Rear)	12,4 - 28
3. Option (Front)	6,00 - 16
3. Option (Rear)	13,6 - 24
DIMENSIONS (mm)	
Length	3755
Height	2230
Wheelbase	1995
Track Width (Front) (mm)	1325 - 1525
Track Width (Rear) (mm)	1370 - 1570
Ground Clearence	310
WEIGHTS (kg)	
Front Weights	2x30 + 50
Rear Weights	2x35 + 50)
Total Weight (Without Ballasts)	1800

https://tractormanualz.com/

2060 BK CLASSIC

- 58 HP, 3 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2060 BK CLASSIC	TECHNICAL SPECIFICATIONS	
ENGINE	2WD	4WD
Engine Type	ITL 3100 FLT	
Emission Type	Stage 3A	
Aspiration	Turbo / Intercooler	
Cubic Capacity / Number of Cylinders (cm³/Number)	2780 / 3	
Max. Engine Power (ISO 14396) (kw/hp/rpm)	43 / 58 / 2100	
Max Torque (Nm / rpm)	230 / 1300	
Engine Cooling System	Water Cooled	
Fuel Capacity (lt)	72	
TRANSMISSION		
Gearbox Type	Mechanical Synchromesh	
Shuttle Arm	-	
Number of Speeds	16 + 8	
4WD Actuation	-	Mechanical
Front Differential Lock System	-	Limited Slip
Rear Differential Lock System	Mechanical	Mechanical
Clutch	Double Plate Dry Type (with independent control for PTO)	
HYRAULIC SYSTEM		
Functions	Position - Power - Mixed	
Hydraulic Power Output Valves	4	
Lifting Capacity (kg)	2600	
Three Point Hitch System	Category II	
POWER TAKE OFF		
Type	Independent Double Speed	
Pto (rpm)	540 (1856)	
Pto (rpm)	540E (1506)	
BRAKES		
Type	Oil Bath Disk Brake	
Foot Brake	Mechanically Controlled	
Hand Brake	Mechanically Controlled	
TYRES		
1. Option (Front)	8,50 - 16	280/70R18
1. Option (Rear)	14,9 - 28	14,9 - 28
2. Option (Front)	8,50 - 16	280/70R20
2. Option (Rear)	14,9 - 30	14,9 - 30
3. Option (Front)	8,50 - 16	280/70R20
3. Option (Rear)	380/85R28	380/85R28
4. Option (Front)	8,50 - 16	280/70R20
4. Option (Rear)	380/85R30	380/85R30
DIMENSIONS (mm)		
Length	3710	3740
Height	2585	
Wheelbase	2000	
Track Width (Front) (mm)	1340 - 1540	1380
Track Width (Rear) (mm)	1385 - 1445	
Ground Clearance	365	
WEIGHTS (kg)		
Front Weights	2x30 + 50	4x30 + 50
Rear Weights	2x50	
Total Weight (Without Ballasts)	2500	2700

https://tractormanualz.com/

2060 BT PLUS

- 58 HP, 3 CYLINDER STAGE III A ENGINE
- 12 FORWARD 12 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2060 BT PLUS — TECHNICAL SPECIFICATIONS

ENGINE	2WD (Perkins)	4WD (Perkins)	2WD (Case)	4WD (Case)
Engine Type	ITL 3100 FLT			
Emission Type	Stage 3A			
Aspiration	Turbo / Intercooler			
Cubic Capacity/Number of Cylinders (cm³/Number)	2780 / 3			
Max. Engine Power (ISO 14396) (kw/hp/rpm)	43 / 58 / 2100			
Max Torque (Nm / rpm)	230 / 1300			
Engine Cooling System	Water Cooled			
Fuel Capacity (lt)	72			
TRANSMISSION				
Gearbox Type	Mechanical Synchromesh			
Shuttle (Synchronizer)	Standart Synchromesh		Standart Synchromesh	
Number of Speeds	12 + 12			
4WD Actuation	-	Mechanical	-	Mechanical
Front Differential Lock System	-	Limited Slip	-	Limited Slip
Rear Differential Lock System	Mechanically Controlled		Mechanically Controlled	
Clutch	Double Plate Dry Type (with independent control for PTO)			
HYRAULIC SYSTEM				
Functions	Position - Power - Mixed			
Hydraulic Power Output Valves	4			
Lifting Capacity (kg)	2600			
Three Point Hitch System	Category II			
POWER TAKE OFF				
Type	Independent Double Speed			
Ground Speed Pto	Standard			
Pto (rpm)	540 (1938)			
Pto (rpm)	540E (1848)			
BRAKES				
Type	Oil Bath Disc Brake			
Foot Brake	Mechanically Controlled			
Hand Brake	Mechanically Controlled			
TYRES				
1. Option (Front)	7,50 - 16	280/85R20	7,50 - 16	280/85R20
1. Option (Rear)	13,6 - 36	13,6 - 36	13,6 - 36	13,6 - 36
2. Option (Front)	7,50 - 16	280/80R20	7,50 - 16	280/80R20
2. Option (Rear)	14,9 - 30	14,9 - 30	14,9 - 30	14,9 - 30
3. Option (Front)	7,5 - 16	280/85R20	7,5 - 16	280/85R20
3. Option (Rear)	340/85 R36	340/85R36	340/85 R36	340/85R36
4. Option (Front)	7,5 - 16	260/80R20	7,5 - 16	260/80R20
4. Option (Rear)	380/85R30	380/85R30	380/85R30	380/85R30
DIMENSIONS (mm)				
Length	4003	3970	4003	3970
Height	2780	2780	2727	2727
Wheelbase	2145	2178	2145	2179
Track Width (Front) (mm)	1400 - 1600	1370 - 1490	1400 - 1600	1370 - 1490
Track Width (Rear) (mm)	1375 - 1512			
Ground Clearence	410			
WEIGHTS (kg)				
Front Weights	4x30 + 50	6x30 + 50	4x30 + 50	6x30 + 50
Rear Weights	2x45			
Total Weight (Without Ballasts)	2720	2840	2820	2840

https://tractormanualz.com/

2075 BK CLASSIC

- 72 HP, 4 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2075 BK CLASSIC — TECHNICAL SPECIFICATIONS

ENGINE	2WD (Reduction)	4WD (Reduction)	2WD (Cabin)	4WD (Cabin)
Engine Type	BT4084ST3			
Emission Type	Stage 3A			
Aspiration	Turbo / Intercooler			
Cubic Capacity / Number of Cylinders (cm³/Number)	3142 / 4			
Max. Engine Power (ISO 14396) (kw/hp/rpm)	53 / 72 / 2500			
Max Torque (Nm / rpm)	273 / 1600			
Engine Cooling System	Water Cooled			
Fuel Capacity (lt)	72			
TRANSMISSION				
Gearbox Type	Mechanical Synchromesh			
Number of Speeds	16 + 8			
4WD Actuation	-	Mechanical	-	Mechanical
Front Differential Lock System	-	Limited Slip	-	Limited Slip
Rear Differential Lock System	Mechanically Controlled		Mechanically Controlled	
Clutch	Double Plate Dry Type (with independent control for PTO)			
HYRAULIC SYSTEM				
Functions	Position - Power - Mixed			
Hydraulic Power Output Valves	4			
Lifting Capacity (kg)	2800			
Three Point Hitch System	Category II			
POWER TAKE OFF				
Type	Independent Double Speed			
Pto (rpm)	540 (1956)			
Pto (rpm)	540E (1506)			
BRAKES				
Type	Oil Bath Disc Brake			
Foot Brake	Mechanically Controlled			
Hand Brake	Mechanically Controlled			
TYRES				
1. Option (Front)	7,50 - 16	11,2 - 24	7,50 - 16	11,2 - 24
1. Option (Rear)	13,6 - 38	13,6 - 38	13,6 - 38	13,6 - 38
2. Option (Front)	7,50 - 16	11,2 - 24	7,50 - 16	11,2 - 24
2. Option (Rear)	16,9 - 30	16,9 - 30	16,9 - 30	16,9 - 30
3. Option (Front)	-	11,2 - 24	-	11,2 - 24
3. Option (Rear)	-	13,6 - 38	-	13,6 - 38
DIMENSIONS (mm)				
Length	3830	3930	3830	3930
Height	2685		2555	
Wheelbase	2105	2215	2105	2215
Track Width (Front) (mm)	1370 - 1570	1380	1370 - 1570	1380
Track Width (Rear) (mm)	1320 - 1520	1320 - 1520	1320 - 1520	1320 - 1520
Ground Clearence	460	460	460	460
WEIGHTS (kg)				
Front Weights	4x30 + 50	6x30 + 50	4x30 + 50	6x30 + 50
Rear Weights	8x(47+54)			
Total Weight (Without Ballasts)	2820	3060	3025	3265

https://tractormanualz.com/

2075 BT PLUS

- 72 HP, 4 CYLINDER STAGE III A ENGINE
- 16 FORWARD 8 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2075 BT PLUS — TECHNICAL SPECIFICATIONS

	2WD (Platform)	4WD (Platform)	2WD (Cabin)	4WD (Cabin)
ENGINE				
Engine Type	BT4084STG			
Emission Type	Stage 3A			
Aspiration	Turbo / Intercooler			
Cubic Capacity / Number of Cylinders (cm³/Number)	3142 / 4			
Max. Engine Power (ISO 14396) (kw/hp/rpm)	53 / 72 / 2500			
Max Torque (Nm / rpm)	273 / 1600			
Engine Cooling System	Water Cooled			
Fuel Capacity (lt)	72			
TRANSMISSION				
Gearbox Type	Mechanical Synchromesh			
Number of Speeds	16 + 8			
4WD Actuation	-	Mechanical	-	Mechanical
Front Differential Lock System	-	Limited Slip	-	Limited Slip
Rear Differential Lock System	Mechanically Controlled		Mechanically Controlled	
Clutch	Double Plate Dry Type (with independent control for PTO)			
HYRAULIC SYSTEM				
Functions	Position - Power - Mixed			
Hydraulic Power Output Valves	4			
Lifting Capacity (kg)	2600			
Three Point Hitch System	Category II			
POWER TAKE OFF				
Type	Independent Double Speed			
Pto (rpm)	540 (1956)			
Pto(rpm)	540E (1508)			
BRAKES				
Type	Oil Bath Disc Brake			
Foot Brake	Mechanically Controlled			
Hand Brake	Mechanically Controlled			
TYRES				
1. Option (Front)	7,50 - 18	11,2 - 24	7,50 - 18	11,2 - 24
1. Option (Rear)	13,6 - 36	13,6 - 36	13,6 - 36	13,6 - 38
2. Option (Front)	7,50 - 16	11,2 - 24	7,50 - 16	11,2 - 24
2. Option (Rear)	16,9 - 30	16,9 - 30	16,9 - 30	16,9 - 30
3. Option (Front)	7,50 - 18	12,4 - 24	7,50 - 16	12,4 - 24
3. Option (Rear)	13,6 - 38	13,6 - 38	13,6 - 38	13,6 - 38
DIMENSIONS (mm)				
Length	3786	3926	3786	3926
Height	2800	2800	2880	2880
Wheelbase	2005	2090	2005	2090
Track Width (Front) (mm)	1370 - 1570	1440 - 1640	1370 - 1570	1440 - 1640
Track Width (Rear) (mm)	1320 - 1520			
Ground Clearance	480			
WEIGHTS (kg)				
Front Weights	4x30 + 50	6x30 + 50	4x30 + 50	6x30 + 50
Rear Weights	2x(47+54)			
Total Weight (Without Ballasts)	2915	3155	3275	3515

https://tractormanualz.com/

2090 S

- 92 HP, 4 CYLINDER STAGE III A ENGINE
- 24 FORWARD 24 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SYNCHROMESH
- MECHANICAL SHUTTLE

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2090 S	TECHNICAL SPECIFICATIONS
ENGINE	4 WD
Engine Type	1104D - 44T
Emission Type	Stage 3A
Aspiration	Turbo / Intercooler
Cubic Capacity/Number of Cylinders (cm³/Number)	4400 / 4
Max. Engine Power (ISO 14396) (kw/hp/rpm)	68 / 92 / 2200
Max Torque (Nm / rpm)	393 / 1400
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	120
TRANSMISSION	
Gearbox Type	Mechanical Synchromesh
Shuttle (Synchronizer)	Standard
Power Hi-Lo	Optional
Number of Speeds	24 + 24
Creeper	-
Maks.-Min. Speed (km/h)	-
4WD Actuation	Electro Hydraulic
Front Differential Lock System	Limited Slip
Rear Differential Lock System	Electro Hydraulic
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	6
Lifting Capacity (kg)	3000
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Double Speed
Ground Speed Pto	Standard
Pto (rpm)	540 (1938)
Pto (rpm)	540E (1848)
BRAKES	
Type	Oil Bath Disc Brake
Foot Brake	Hydraulic Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	280/65R24
1. Option (Rear)	340/65R38
2. Option (Front)	320/65R24
2. Option (Rear)	460/65R30
DIMENSIONS (mm)	
Length	4313
Height	2610
Wheelbase	2400
Track Width (Front) (mm)	1420 - 1840
Track Width (Rear) (mm)	1420 - 1820
Ground Clearance	495
WEIGHTS (kg)	
Front Weights	8x30 + 50
Rear Weights	4 x 45
Total Weight (Without Ballasts)	3715
ACCESSORIES	
Ledbar	Optional
Rear Cam And Display	Optional

https://tractormanualz.com/

2110 S

- 110 HP, 4 CYLINDER STAGE III A ENGINE
- 24 FORWARD 24 REVERSE GEARS
- TURBO / INTERCOOLER
- MECHANICAL SHUTTLE

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

2110 S	TECHNICAL SPECIFICATIONS
ENGINE	4 WD
Engine Type	1104D - 44T
Emission Type	Stage 3A
Aspiration	Turbo / Intercooler
Cubic Capacity/Number of Cylinders (cm³/Number)	4400 / 4
Max. Engine Power (ISO 14396) (kw/hp/rpm)	81 / 110 / 2200
Max Torque (Nm / rpm)	420 / 1400
Engine Cooling System	Water Cooled
Fuel Capacity (lt)	120
TRANSMISSION	
Gearbox Type	Mechanical Synchromesh
Shuttle (Synchronizer)	Standard
Power Hi-Lo	Optional
Number of Speeds	24 + 24
Creeper	-
Maks.-Min. Speed (km/h)	-
4WD Actuation	Electro Hydraulic
Front Differential Lock System	Limited Slip
Rear Differential Lock System	Electro Hydraulic
Clutch	Double Plate Dry Type (with independent control for PTO)
HYRAULIC SYSTEM	
Functions	Position - Power - Mixed
Hydraulic Power Output Valves	6
Lifting Capacity (kg)	4500
Three Point Hitch System	Category II
POWER TAKE OFF	
Type	Independent Double Speed
Ground Speed Pto	Standard
Pto (rpm)	540 (1836)
Pto (rpm)	540E (1648)
BRAKES	
Type	Oil Bath Disc Brake
Foot Brake	Hydraulic Controlled
Hand Brake	Mechanically Controlled
TYRES	
1. Option (Front)	380 /85R28
1. Option (Rear)	460/85R34
2. Option (Front)	340/85R28
2. Option (Rear)	380/85R38
DIMENSIONS (mm)	
Length	4645
Height	2917
Wheelbase	2450
Track Width (Front) (mm)	1730 - 1930
Track Width (Rear) (mm)	1700 - 1900
Ground Clearance	527
WEIGHTS (kg)	
Front Weights	12x40 + 50
Rear Weights	8 x 45
Total Weight (Without Ballasts)	4355
ACCESSORIES	
Ladder	Optional
Rear Cam And Display	Optional

https://tractormanualz.com/

5120

- 116 HP, 4 CYLINDER STAGE IV FINAL ENGINE
- 32 FORWARD 32 REVERSE GEARS
- 4 SPEED POWER SHIFT
- TURBO / INTERCOOLER
- MULTI CONTROLLER BOARD
- POWER SHUTTLE

CHARMING DESIGN

DRIVING PLEASURE

HIGH PERFORMANCE

LOW FUEL CONSUMPTION

BROAD SERVICE NETWORK

BASAK

5120	TECHNICAL SPECIFICATIONS
ENGINEE	
Type	TCD3.6
Number of Cylinders / Aspiration (Number)	4 /Turbo-Intercooler
Cubic Capacity (lt)	3.6
Bore and Stroke (mm)	98X120
Rated Power (kW/Hp)	85/116
Maximum Torque (Nm/Rpm) 480 @ 1400	480 @ 1400
Maximum Power Rated Speed (Rpm)	2200
Emission Standard	Stage IV FINAL
Fuel Pump	Common Rail
Fuel Tank (lt)	200
TRANSMISSION	
4 Speed Power-Shift	Standard
Power-Shuttle	Standard
Number of Speeds	32 F - 32 R
Differential Lock (Electro-Hydraulic)	Standard
Automatically Front Differential Lock System	Standard
4WD Actuation (Electro-Hydraulic)	Standard
4 Wheel Braking Standard	Standard
HYDRAULIC SYSTEM	
Control	Electronic
Lifting Capacity (Max - Kg)	5900
Number of Hydraulic Power Outputs	6 (8-10 Optional)
Travel Hitch	Standard
External hydraulic Controls	Standard
Trailer Air Braking Valve	Standard
POWER TAKE OFF	
Type	Independent 4 Speed
Speed	540 - 540E - 1000-1000E
Hydraulically Actuated PTO	Standard
Front Pto	Optional
Front Pto Speed	1000
BRAKES	
Type	Oil Bath Disk Brake
Foot Brake	Mechanically Controlled
Hand Brake	Mechanically Controlled
DIMENSIONS (mm)	
Length	4840
Wheelbase	2500
Height	2745
Track Width (Front)	1634-1974
Track Width (Rear)	1610-2010
Ground Clearence	327-480
TYRES	
Standard (Front)	380/70 R 28
Standard (Rear)	420/85 R 38
Option 1 (Front)	380/ 70 R 28
Option 1 (Rear)	480/70 R 38
Option 2 (Front)	420/ 70 R 24
Option 2 (Rear)	420/ 85 R 34
Option 3 (Front)	380/ 85 R 24
Option 3 (Rear)	380/ 85 R 38
WEIGHTS (kg)	
Front Weights	12x40
Total Weight (Without Ballasts)	5000

https://tractormanualz.com/

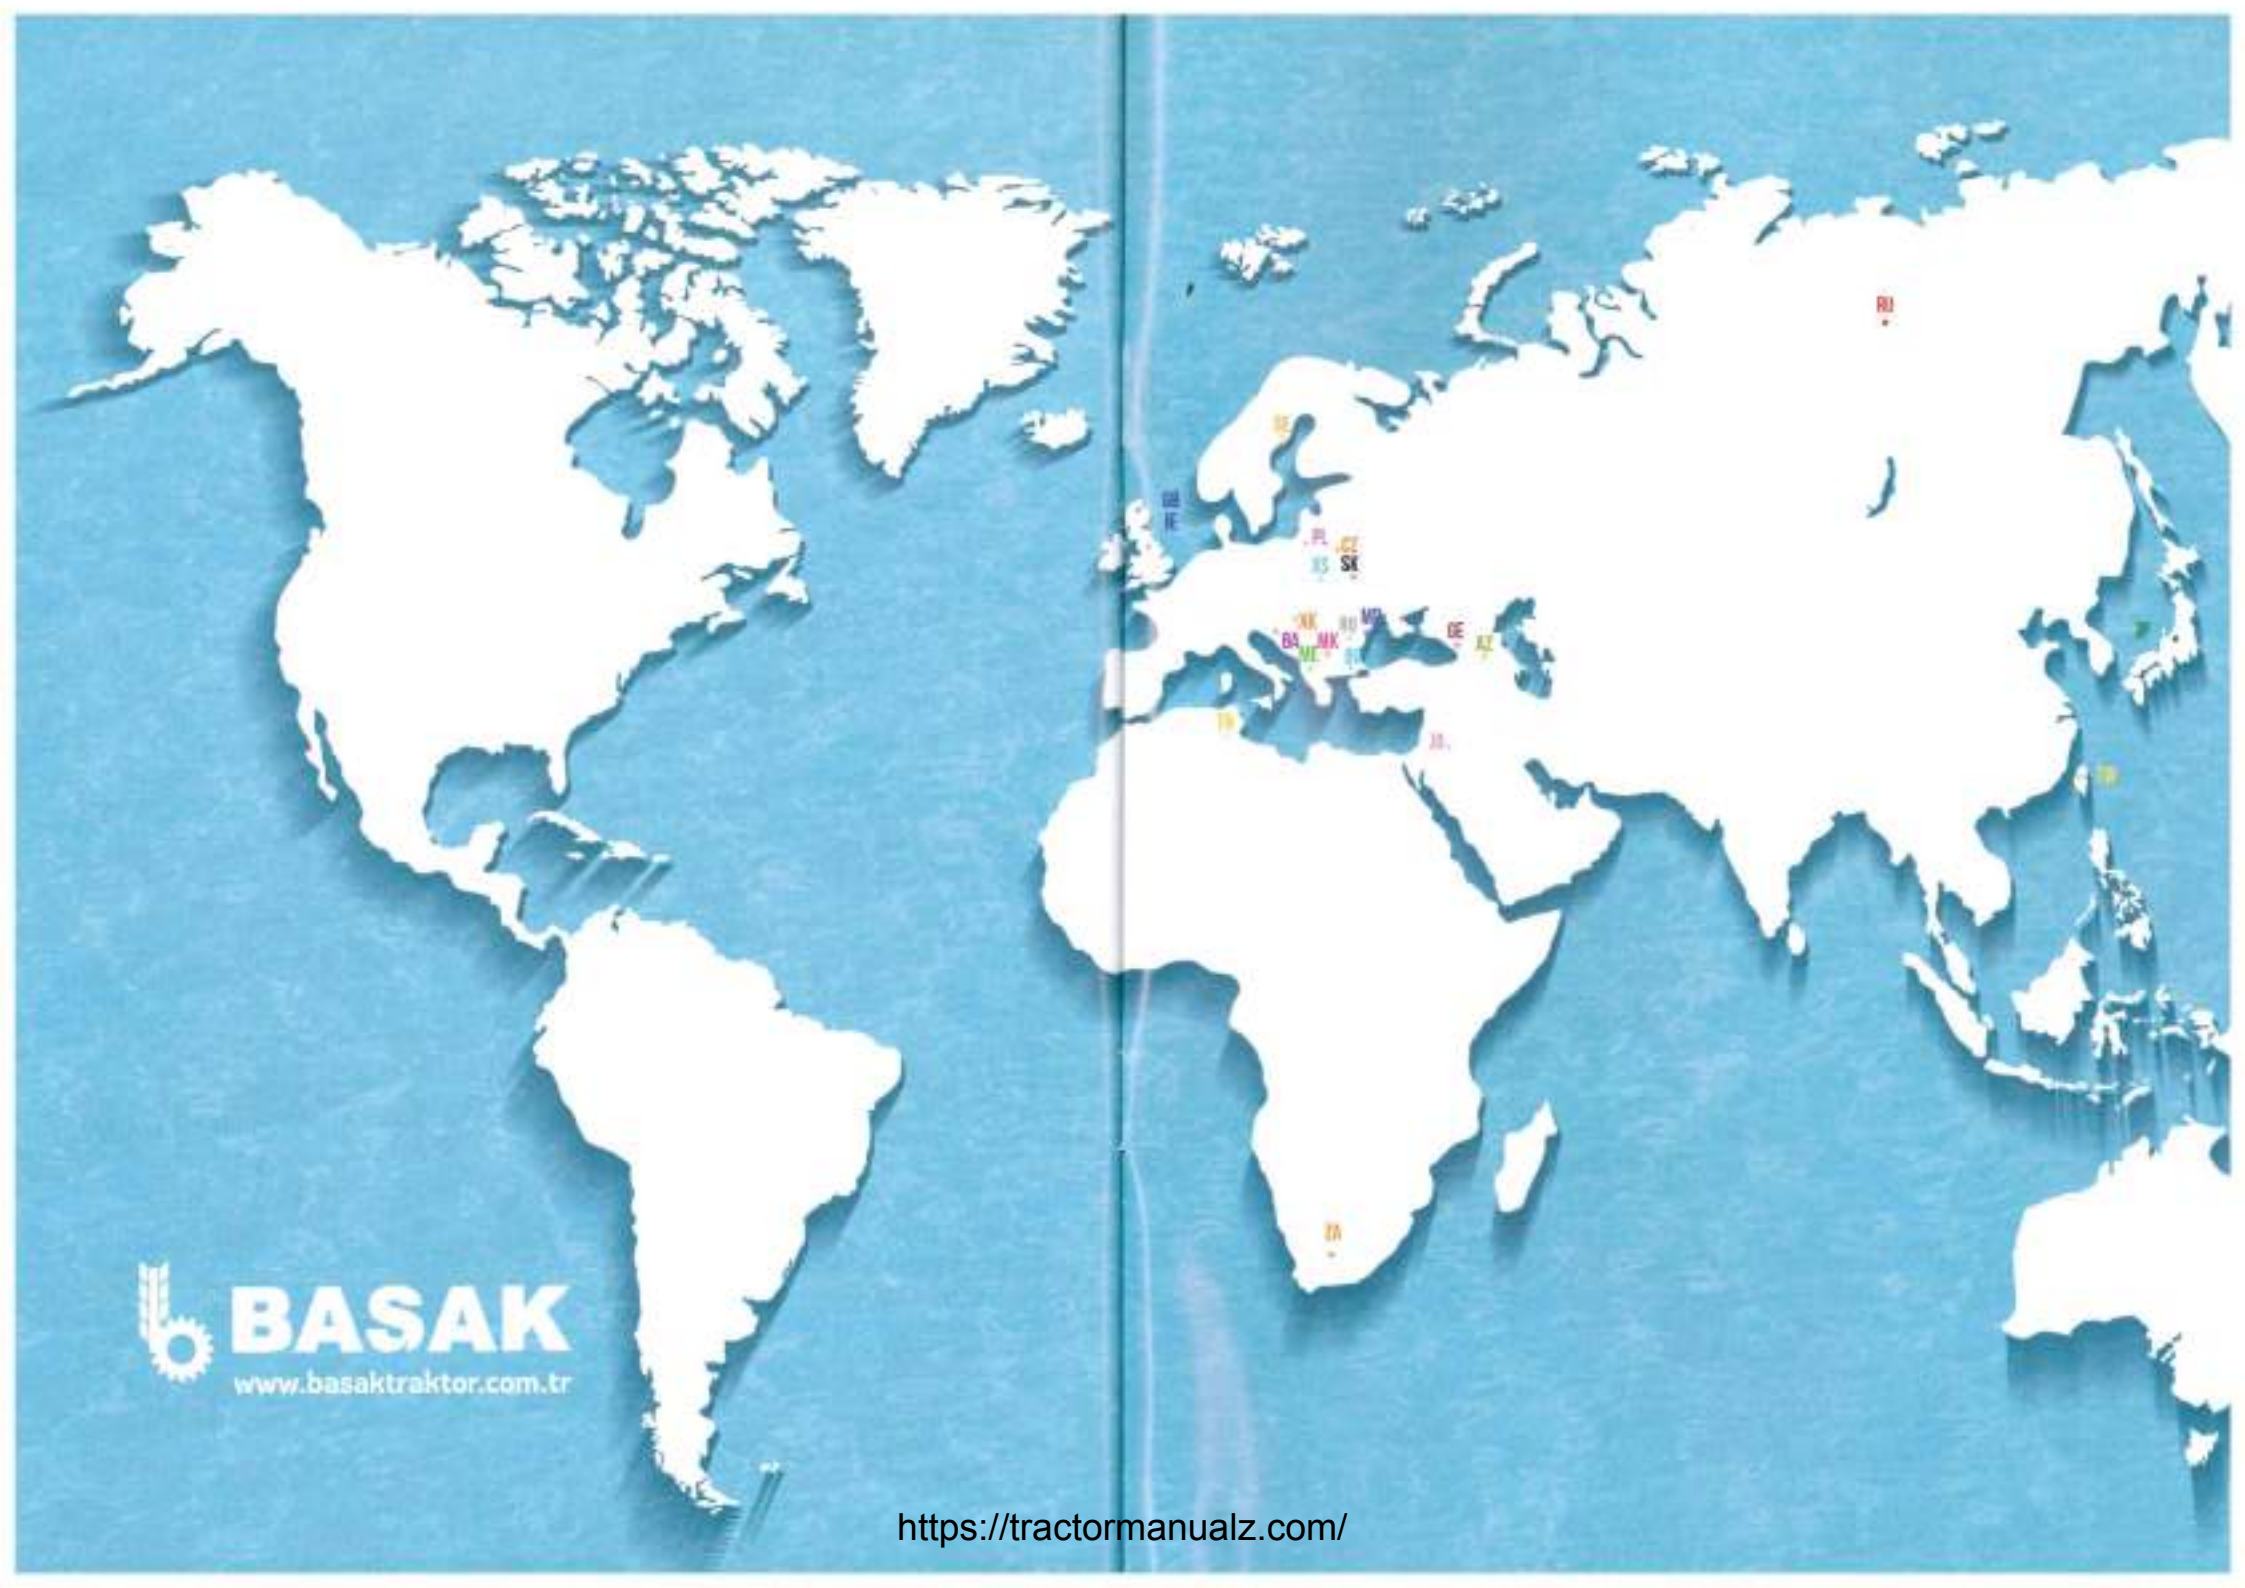

https://tractormanualz.com/