



AD25B ARTICULATED DUMP TRUCK

4X2 | 4X4



BUILT AFRICA TOUGH

machinesales@dezzi.co.za

www.dezzi.co.za



AD25B ARTICULATED DUMP TRUCK

SPECIFICATION SHEET

*Desmond Equipment SA (Pty) Ltd reserves the right to modify specifications without notice.

ENGINE

TYPE : Cummins
MODEL : QSB 260 - TIER 3
CAPACITY : 6.7 Liters
POWER : 260Hp (194KW) @ 2200RPM
TORQUE : 990Nm @ 1500RPM

TRANSMISSION

TYPE : ZF
MODEL : 6WG210
GEARING : Constant mesh counter shaft with integral drop box
GEARS : Forward - 6
Reverse - 3
SPEED : 42Km/H
TORQUE CONVERTER : Single phase 3 element, lock-up clutches effective in all gears. Downshift protection.

AXLES

4X2

FRONT : Desmond Axle with self leveling air-ride suspension
REAR : ZF MT-D 3135 axle - rigid mounted

4X4

FRONT : ZF MT-D 3095 axle - with self leveling air-ride suspension
REAR : ZF MT-D 3135 axle - rigid mounted

TYRES

FRONT : 26.5 R25 REAR : 26.5 R25

BRAKES

FRONT WHEELS : Sealed outboard wet disc brakes
REAR WHEELS : Sealed outboard wet disc brakes
PARK BRAKE : Failsafe spring-applied hydraulic release

FRAME

Heavy duty robust frame, front and rear with tube type oscillation, adjustable

STEERING

- Articulated with 36 degree steering angle either side
- Load-sensing, orbital-controlled
- Ground driven emergency steering

ELECTRICS

VOLTAGE : 24 Volt
BATTERY : 2 x 12 Volt sealed type
ALTERNATOR : 24 Volt / 70 Amp

HYDRAULIC SYSTEM

OIL CAPACITY : 160 Liters
PUMPS : Variable displacement piston pump
WORKING PRESSURE : Steering - 13.7 Mpa
Tipping - 17 Mpa
Full flow filtration

CAB

- Fully adjustable weight compensation suspension seat with seat belt
- ROPS and FOPS certified
- Windscreen wiper
- Rotating orange beacon light
- Interior dome light
- Rubber mounted
- Fully enclosed and lockable
- Rear cab night working light
- Trainer-driver seat

SERVICE CAPACITIES

COOLING SYSTEM : 50 Liters
ENGINE CRANKCASE : 21 Liters
REAR AXLE DIFFERENTIAL : 40 Liters
TRANSMISSION : 18 Liters
DIESEL TANK : 250 Liters
4x4
FRONT DIFFERENTIAL : 36 Liters
FRONT PLANETARY HUBS : 8 Liters per side

OPERATIONAL WEIGHTS

	Tare	Gross	Payload
FRONT AXLE :	9 480	18 980	9 500
REAR AXLE :	7 420	22 920	15 500
TOTAL :	16 900	41 900	25 000

STANDARD EQUIPMENT


- Emergency braking (front & rear)
- Hinged belly plate under engine
- Rear window guard
- Tinted windows
- Dash board with full instrumentation
- Air-conditioner
- Bin up alarm

TIPPING TIMES (APPROXIMATE)

UP : 8.2 Seconds DOWN : 7.1 Seconds

LOAD BIN VOLUMES

SAE 1:1 : 16,2m³ SAE 2:1 : 13,3m³ STRUCK : 10,0m³

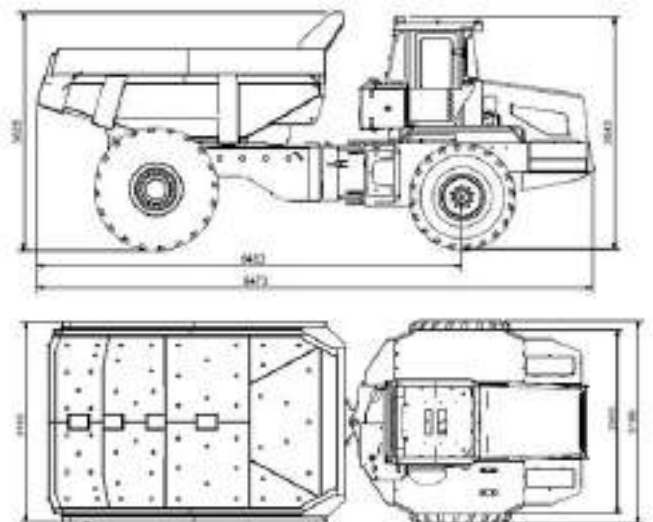

BUILT AFRICA TOUGH



CALL : 0800 DEZZI / 33994

Head Office: +27 (0)39-685 4100

Email: machinesales@dezzi.co.za

www.dezzi.co.za